

TPMC670 16/8 Digital Inputs (24V) 16/8 Digital Outputs (24V, 0.5A)

Application Information

The TPMC670 is a standard single-width 32 bit PMC with 16 / 8 24V digital inputs galvanically isolated from the computer system by optocoupler. The inputs are also potential free to each other in groups of four inputs. A high performance input circuit ensures a defined switching point and polarization protection against confusing the pole. All inputs have a common electronic debounce circuit with a freely programmable debounce time. All inputs can generate an interrupt. The signal edge handling is programmable to interrupt on rising, falling or both edges of the input signal.


The TPMC670 has 16 / 8 digital high side switches with galvanic isolation from the computer system by optocoupler. The outputs are also isolated against each other in groups of four outputs. All outputs are protected against short-circuit and thermal overload. The output driver are capable of driving 0.5A continuous per channel. A hardware watchdog clears all outputs in case of trigger fail. The TPMC670-1x provides front panel I/O, the TPMC670-2x provides P14 I/O.



For First Time Users the engineering documentation TPMC670-ED is recommended. The engineering documentation includes TPMC670-DOC, schematics and data sheets. Driver support (TPMC670-SW-xx) for different operating systems is available.

Technical Information

- Standard single-width 32 bit PMC module conforming to IEEE P1386.1
- PCI 2.1 compliant interface
- Board size: 149mm x 74mm
- 16 / 8 interrupt generating digital inputs
- 24 V signal voltage for inputs
- Optocoupler for galvanic isolation
- All inputs isolated to each other in groups of four inputs
- Programmable electronic debounce circuit (7µs to 440ms in steps of 7µs),
- 16 / 8 digital outputs, high side switches
- 24 V signal voltage, current per output 0.5A
- Optocoupler for galvanic isolation
- Outputs are short-circuit protected
- Outputs are isolated to each other in groups of four outputs
- Outputs protected against thermal overload
- Watchdog timer resets all channels in case of trigger failure

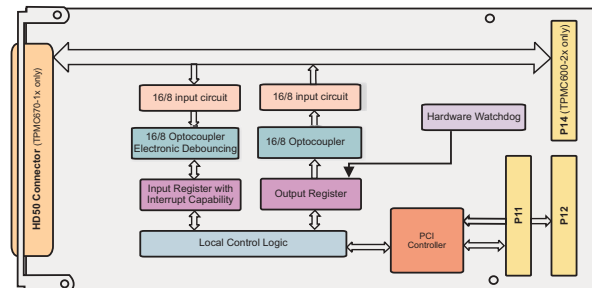

Order Information

- TPMC670-10** 16 Digital Inputs, 16 Digital Outputs, front panel I/O
- TPMC670-11** 8 Digital Inputs, 8 Digital Outputs, front panel I/O
- TPMC670-20** 16 Digital Inputs, 16 Digital Outputs, P14 I/O
- TPMC670-21** 8 Digital Inputs, 8 Digital Outputs, P14 I/O
- TPMC670-DOC** User Documentation
- TPMC670-ED** Engineering Documentation, includes TPMC670-DOC
- TA301-10** Cable Kit for modules with HD50 Connector
- TPMC670-SW-12** OS-9 Software Support
- TPMC670-SW-32** pSOS Software Support
- TPMC670-SW-42** VxWorks Software Support
- TPMC670-SW-62** Windows NT 4.0 Software Support
- TPMC670-SW-65** Windows XP/2000/98 SE/ME Software Support
- TPMC670-SW-72** LynxOS Software Support
- TPMC670-SW-82** LiNux Software Support
- TPMC670-SW-92** QNX 4 Software Support
- TPMC670-SW-95** QNX 6 Software Support